

คาปาซิเตอร์ ใช้แก้ไขเพาเวอร์แฟคเตอร์

กระแสลัมป์ 3 เฟส มาตรฐาน IEC 60831-1+2, UL 810 แบบแห้ง บรรจุก๊าซไนโตรเจน

มีระบบรักษาตัวเอง และป้องกันแรงดันเกิน (Overpressure Disconnecter)

Three-phase capacitors							P.20240514
Type	kVAr	I _R (A)	C _R	dxh	Fuse A	สายไฟ ¹⁾	Price
	50Hz		mF	mm		ตร.มม	
PhaseCap Energy-03							
Rated voltage 400 V AC	400V						
MKK400-D-12.5-03	12.5	18	3 x 82.9	85 x 200	35	6	8,000
MKK400-D-20-03	20	28.9	3 x 132.6	100 x 224	50	10	9,500
MKK400-D-25-03	25	36.1	3 x 165.8	116 x 192	63	16	10,500
MKK400-D-30-03	30	43.3	3 x 198.9	116 x 224	80	25	11,000
Rated voltage 440 V AC							
Rated voltage 440 V AC	440 V						
MKK440-D-20-03	20	26.2	3 x 109.6	100 x 207	50	10	9,000
MKK440-D-28.1-03	28.1	36.9	3 x 154.0	116 x 207	63	16	10,500
MKK440-D-30-03	30	39.4	3 x 164.4	125 x 192	63	16	10,500
Rated voltage 480 V AC							
Rated voltage 480 V AC	480 V						
MKK480-D-20-03	20	24.1	3 x 92.1	100 x 207	50	10	9,900
MKK480-D-25-03	25	30.1	3 x 115.1	116 x 192	50	10	12,600
MKK480-D-30-03	30	36.1	3 x 138.1	125 x 192	63	16	14,600
Rated voltage 525 V AC							
Rated voltage 525 V AC	525 V						
MKK525-D-15-03	15	16.5	3 x 57.7	85 x 218	25	4	7,200
MKK525-D-20-03	20	22	3 x 77	100 x 224	35	6	9,500
MKK525-D-25-03	25	27.5	3 x 96.2	116 x 207	50	10	12,600

Film Capacitors – Power Factor Correction B25674A
PhaseCap Energy Capacitors - Gas-filled MKK

Construction

- Dielectric: Polypropylene film
- Gas-impregnated, dry type, Non-PCB
- Wave cut
- Extruded round aluminum can with stud
- Provided with ceramic discharge module or discharge module block
- Over pressure disconnector for all 3 phases

Features

- Three-phase, delta connected
- Self-healing technology
- Naturally air cooled (or forced air cooling)
- Indoor mounting

Typical applications

- For Power Factor Correction

Terminals

- Optimized capacitor safety terminals


Mounting

- Threaded stud at bottom of can (max. torque for M12 = 10 Nm)



Dimensional drawings

Terminal type A

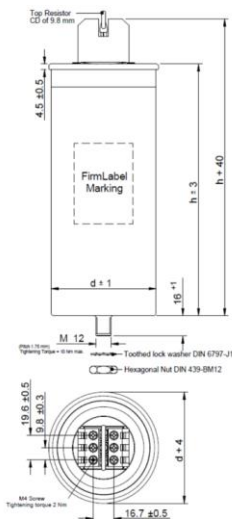

Terminal type B

